Technical Report 12

SOME ADDITIONAL THEOREMS

FOR A NON-STATIONARY STOCHASTIC PROCESS

WITH A CONTINUOUS, NON-RANDOM, TIME-DEPENDENT COMPONENT

Prepared for:
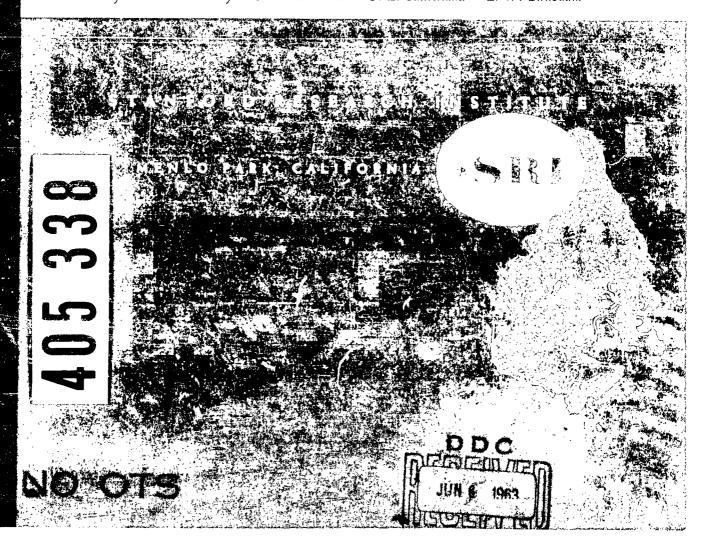
ADVANCED RESEARCH PROJECTS AGENCY
THE PENTAGON
WASHINGTON 25, D.C.
ATTN: LT. COL. KENNETH COOPER

CONTRACT SD-103 UNDER
ARPA ORDER 281-62
PROJECT CODE 7400

By: R. C. McCarty   G. W. Evans II   G. L. Sutherland   Z. W. Birnbaum

405 338

NO OTS

DDC

JUN 6 1963

STANFORD RESEARCH INSTITUTE

MENLO PARK, CALIFORNIA

SRI

April 1963

Technical Report 12

SOME ADDITIONAL THEOREMS

FOR A NON-STATIONARY STOCHASTIC PROCESS

WITH A CONTINUOUS, NON-RANDOM, TIME-DEPENDENT COMPONENT

By: R. C. McCarty   G. W. Evans II   G. L. Sutherland
            Mathematical Sciences Department
      Z. W. Birnbaum
     University of Washington (S.R.I. Consultant)

SRI Project No. 3857

Approved:

CARSON FLAMMER, MANAGER   MATHEMATICAL PHYSICS DEPARTMENT

D. R. SCHEUCH, DIRECTOR   ELECTRONICS AND F L O SCIENCES DIVISION

ABSTRACT

In Technical Report 4,[1][†] several definitions and theorems were presented to aid in the analysis of a sub-class of non-stationary processes consisting of a random component and a continuous non-random function of time, each component defined over the same finite time interval. This report supplements the results of Technical Report 4 both by extending the sub-class of non-stationary processes under consideration and by including additional theorems.

[†]References are listed at the end of this report.

CONTENTS

I INTRODUCTION

This report is divided into three sections. Section I summarizes some of the results of Technical Report 4.[1] Section II describes both theorems that are natural extensions to those of Technical Report 4, and extensions to the sub-class of processes considered in the above report. Section III indicates areas for further investigation. The approach followed in the first two sections is to generalize or extend the power spectral density function for stationary stochastic processes so that it may be applied to non-stationary stochastic processes. That is, the approach follows from a desire to obtain, from the observation of a time-dependent non-stationary signal, the energy contributions at one or more average frequencies. The time interval of observation is to be sufficiently large that an energy contribution to an average frequency may be extracted, but not so large that the process changes appreciably during the time of observation. Thus, through successive observations, the change in average frequency may be observed.

Consider a random process $\{Y(t)\}$ consisting of an ensemble of member functions $y_m(t)$, $m = 1, 2, \ldots, M$, defined for the interval $0 \leq t \leq 2T$. For this process the autocovariance $\psi(\tau)$ is redefined as

DEFINITION 1

$$\psi(\tau) = E[A_{y_m(t)y_m(t+\tau)}] - E[A_{y_m(t)}]E[A_{y_m(t+\tau)}]$$

where

$$A_{y_m(t)} = \frac{1}{T}\int_0^T y_m(t)dt$$

$$A_{y_m(t+\tau)} = \frac{1}{T}\int_0^T y_m(t+\tau)dt , \quad 0 \leq \tau \leq T$$

1

and

$$A_{y_m(t)y_m(t+\tau)} = \frac{1}{T} \int_0^T y_m(t)y_m(t+\tau)dt , \quad 0 \leq \tau \leq T .$$

The power spectral density function $\Phi(\omega)$ of the process $\{Y(t)\}$ is given with respect to $\psi(\tau)$ in the usual way except that the interval over which the Fourier cosine transform is performed is finite, hence

DEFINITION 2

$$\Phi(n\omega_T) = \frac{1}{T} \int_0^T \psi(\tau) \cos n\omega_T\tau d\tau$$

where

$$\omega_T T = 2\pi .$$

The preceding definitions are applied to a subclass of non-stationary stochastic processes represented by those processes $\{Y(t)\}$ consisting of member functions $y_m(t)$, $m = 1, 2, \ldots, M$ and $t\epsilon[0, 2T]$ which may be represented by

$$y_m(t) = \theta_m(t) + f(t)$$

where $\theta_m(t)$ is a member function of a stationary stochastic process $\{\Theta(t)\}$ and $f(t)$ is a deterministic function inducing non-stationarity and is statistically independent of $\theta_m(t)$. In particular, the ensemble $\{Y(t)\}$ is said to satisfy

Condition [A]

(1) $\theta_m(t)$ has c.d.f.[†] $G(\theta_m)$ with $-\infty < \theta_m < +\infty$ for every $m = 1, 2, \ldots, M$ and each $t\epsilon[0, 2T]$.

[†] Cumulative distribution function is abbreviated c.d.f.

(2) $E[\theta_m(t)] = E[\theta_m(t + \tau)] = E[\theta] = \int_{-\infty}^{\infty} \theta dG(\theta) < \infty$ for every $m = 1, 2, \ldots, M$ and each $t \in [0, 2T]$.

(3) $f(t) \in L_2$ where L_2 is the class of square integrable functions.

The following theorems have been proven in Technical Report 4.

THEOREM 1

Given an ensemble of member functions $y_m(t) = \theta_m(t) + f(t)$ satisfying Condition [A], then the autocovariance, $\psi(\tau)$, of the process is separable into two components such that

$$\psi(\tau) = \psi_\theta(\tau) + \psi_f(\tau)$$

where

$$\psi_\theta(\tau) = E[\theta(t)\theta(t + \tau)] - E^2[\theta(t)]$$

and

$$\psi_f(\tau) = A_{f(t)f(t+\tau)} - A_{f(t)}A_{f(t+\tau)} \quad .$$

Theorem 1 shows that if $f(t) \equiv 0$, the autocovariance, $\psi(\tau) = \psi_\theta(\tau)$, is the accepted definition for stationary stochastic process. Similarly, if $\theta_m(t) \equiv 0$ for all m and if $f(t)$ is periodic with fundamental period T, then the autocovariance, $\psi(\tau) = \psi_f(\tau)$, is the accepted definition for periodic functions,

THEOREM 2

The power spectral density function, $\Phi(n\omega_T)$, for an ensemble of member functions $y_m(t)$ satisfying condition [A] is separable into two components such that

$$\Phi(n\omega_T) = \Phi_\theta(n\omega_T) + \Phi_f(n\omega_T) \quad .$$

where

$$\Phi_\theta(n\omega_T) = \frac{1}{T}\int_0^T \psi_\theta(\tau)\,\cos\,n\omega_T\tau d\tau$$

and

$$\Phi_f(n\omega_T) = \frac{1}{T}\int_0^T \psi_f(\tau)\,\cos\,n\omega_T\tau d\tau$$

This theorem follows directly from Theorem 1 and from the fact that a Fourier transform is a linear operation.

If in the preceding theorem $\psi_f(\tau) \equiv 0 - e.g.,\; f(t) \equiv 0$ — then

$$\lim_{T\to\infty}\Phi(n\omega_T) = \lim_{T\to\infty}\Phi_\theta(n\omega_T) = \Phi_\theta(\omega) = \frac{1}{\pi}\int_0^\infty \psi_\theta(\tau)\,\cos\,\omega\tau d\tau$$

is an acceptable definition for the power spectral density function of a stationary stochastic process; and if $\psi_\theta(\tau) \equiv 0$ and $f(t)$ is periodic with fundamental period T, then $\Phi(n\omega_T) = \Phi_f(n\omega_T)$ represents a definition for the power spectral density function of a periodic function.

II   EXTENSIONS

Generally, in applications of power spectral density methods, an additional condition is imposed on ensembles $\{Y(t)\}$ satisfying Condition [A] so that estimates of $\Phi(n\omega_T)$ may be obtained from a single member function $y_m(t)$. The additional condition is one of ergodicity and is stated as follows:

Condition [B]

For the random component $\theta_m(t)$ of Condition [A]

$$E[\theta] \;=\; \int_{-\infty}^{\infty} \theta dg(\theta) \;=\; E[\theta_m(t)] \;=\; \lim_{T\to\infty}\left\{\frac{1}{M}\sum_{m=1}^{M}\theta_m(t)\right\} \;=\; \lim_{M\to\infty}\left\{\frac{1}{T}\int_0^T \theta_m(t)dt\right\}$$

$$E[\theta] \;=\; E[\theta_m(t+\tau)] \;=\; \lim_{M\to\infty}\frac{1}{M}\sum_{m=1}^{M}\theta_m(t+\tau) \;=\; \lim_{T\to\infty}\left\{\frac{1}{T}\int_0^T \theta_m(t+\tau)dt\right\}$$

$$E[\theta(t)\theta(t+\tau)] \;=\; \int_{-\infty}^{\infty} \theta(t)\theta(t+\tau)dH[\theta(t),\,\theta(t+\tau)] \;=\; E[\theta_m(t)\theta_m(t+\tau)]$$

$$=\; \lim_{M\to\infty}\left\{\frac{1}{M}\sum_{m=1}^{M}\theta_m(t)\theta_m(t+\tau)\right\} \;=\; \lim_{T\to\infty}\left\{\frac{1}{T}\int_0^T \theta_m(t)\theta_m(t+\tau)dt\right\}$$

where the time averages hold for each value of $m = 1,2,\ \ldots,\ M$, and $H[\theta(t),\ \theta(t+\tau)]$ is the joint c.d.f. of $\theta(t)$ and $\theta(t+\tau)$

Applications assuming ergodicity imply that the frequency analysis is derived from a single member function, indicating that an estimate for $\psi(\tau)$ must be used in place of Definition 1. Thus the following estimates are defined:

DEFINITION 3

$$\hat{E}[\theta_{\mathbf{R}}(t)] \;=\; \frac{1}{T}\int_{0}^{T}\theta_{\mathbf{R}}(t)dt$$

$$\hat{E}[\theta_{\mathbf{R}}(t+\tau)] \;=\; \frac{1}{T}\int_{0}^{T}\theta_{\mathbf{R}}(t+\tau)dt$$

$$\hat{E}[\theta_{\mathbf{R}}(t)\theta_{\mathbf{R}}(t+\tau)] \;=\; \frac{1}{T}\int_{0}^{T}\theta_{\mathbf{R}}(t)\theta_{\mathbf{R}}(t+\tau)d\tau \quad .$$

$\hat{E}[\theta_{\mathbf{R}}(t)]$ and $\hat{E}[\theta_{\mathbf{R}}(t+\tau)]$ are estimates for $E[\theta]$, and $\hat{E}[\theta_{\mathbf{R}}(t)\theta_{\mathbf{R}}(t+\tau)]$ is an estimate for $E[\theta_{\mathbf{R}}(t)\theta_{\mathbf{R}}(t+\tau)]$ in the sense of Condition [B]. The expressions in Definition 3 permit an estimate for $\psi(\tau)$—namely, $\overset{\wedge}{\psi}(\tau)$—which is given as follows:

DEFINITION 4

$$\overset{\wedge}{\psi}_{\mathbf{R}}(\tau) \;=\; A_{y_{\mathbf{R}}(t)y_{\mathbf{R}}(t+\tau)} \;-\; A_{y_{\mathbf{R}}(t)}A_{y_{\mathbf{R}}(t+\tau)} \quad .$$

and for the random component

$$\overset{\wedge}{\psi}_{\theta_{\mathbf{R}}}(\tau) \;=\; A_{\theta_{\mathbf{R}}(t)\theta_{\mathbf{R}}(t+\tau)} \;-\; A_{\theta_{\mathbf{R}}(t)}A_{\theta_{\mathbf{R}}(t+\tau)} \quad .$$

Note that $\overset{\wedge}{\psi}_{f}(\tau) = \psi_{f}(\tau)$. Using the expression for $\overset{\wedge}{\psi}_{\mathbf{R}}(\tau)$, an estimate for the power-spectral-density, $\overset{\wedge}{\Phi}(n\omega_{T})$, is given by Definition 5.

DEFINITION 5

$$\overset{\wedge}{\Phi}(n\omega_{T}) \;=\; \frac{1}{T}\int_{0}^{T}\overset{\wedge}{\psi}_{\mathbf{R}}(\tau)\cos n\omega_{T}\tau d\tau \quad .$$

Because of Conditions [A] and [B] and Definitions 1 through 5, $\overset{\wedge}{\Phi}_{\mathbf{R}}(n\omega_{T})$ is an estimate for $\Phi(n\omega_{T})$ in the sense of the following theorem.

THEOREM 3

Let $\overline{\Phi_M(n\omega_T)} = \dfrac{1}{M} \sum\limits_{m=1}^{M} \overset{\wedge}{\Phi}_m(n\omega_T)$. Then for a non-stationary process $\{Y(t)\}$ containing member functions $y_m(t)$ satisfying Conditions [A] and [B],

$$\lim_{M \to \infty} \overline{\{\Phi_M(n\omega_T)\}} = \Phi_f(n\omega_T) + \frac{1}{T} \int_0^T \left[\lim_{M \to \infty} \left\{ \frac{1}{M} \sum_{m=1}^{M} \overset{\wedge}{\psi}_{\theta_m}(\tau) \right\} \right] \cos n\omega_T \tau \, d\tau$$

and by an additional limiting process

$$\lim_{M \to \infty} \lim_{T \to \infty} \overline{\{\Phi_M(n\omega_T)\}} = \Phi_f(n\omega_T) + \Phi_\theta(n\omega_T)$$

Proof:

By Definitions 4 and 5

$$\overset{\wedge}{\Phi}_m(n\omega_T) = \frac{1}{T} \int_0^T \left[A_{y_m(t)y_m(t+\tau)} - A_{y_m(t)} A_{y_m(t+\tau)} \right] \cos n\omega_T \tau \, d\tau$$

$$= \frac{1}{T} \int_0^T \left[\frac{1}{T} \int_0^T y_m(t)y_m(t+\tau)dt - \frac{1}{T^2} \int_0^T y_m(t)dt \int_0^T y_m(t+\tau)dt \right] \cos n\omega_T \tau \, d\tau$$

$$= \frac{1}{T} \int_0^T \left[\frac{1}{T} \int_0^T \theta_m(t)\theta_m(t+\tau)dt + \frac{1}{T} \int_0^T f(t)f(t+\tau)dt + \frac{1}{T} \int_0^T \theta_m(t)f(t+\tau)dt \right.$$

$$+ \frac{1}{T} \int_0^T \theta_m(t+\tau)f(t)dt - \frac{1}{T^2} \int_0^T \theta_m(t)dt \int_0^T \theta_m(t+\tau)dt$$

$$- \frac{1}{T^2} \int_0^T f(t)dt \int_0^T f(t+\tau)dt - \frac{1}{T^2} \int_0^T \theta_m(t)dt \int_0^T f(t+\tau)dt$$

$$\left. - \frac{1}{T^2} \int_0^T \theta_m(t+\tau)dt \int_0^T f(t)dt \right] \cos n\omega_T \tau \, d\tau$$

7

$$= \frac{1}{T} \int_0^T \left[A_{\theta_m(t)\theta_m(t+\tau)} - A_{\theta_m(t)} A_{\theta_m(t+\tau)} + A_{f(t)f(t+\tau)} \right.$$

$$\left. - A_{f(t)} A_{f(t+\tau)} + R(y_m) \right] \cos n\omega_T \tau d\tau$$

$$= \Phi_f(n\omega_T) + \frac{1}{T} \int_0^T [\hat{\psi}_{\theta_m}(\tau) + R(y_m)] \cos n\omega_T \tau d\tau$$

where

$$R(y_m) = \frac{1}{T} \int_0^T \theta_m(t) f(t + \tau) dt - \frac{1}{T^2} \int_0^T \theta_m(t) dt \int_0^T f(t + \tau) dt$$

$$+ \frac{1}{T} \int_0^T \theta_m(t + \tau) f(t) dt - \frac{1}{T^2} \int_0^T \theta_m(t + \tau) dt \int_0^T f(t) dt \quad .$$

Now $R(y_m)$ has the following property as a result of Condition $[B]$:

$$\lim_{M \to \infty} \left\{ \frac{1}{M} \sum_{m=1}^M \left[\frac{1}{T} \int_0^T R(y_m) \cos n\omega_T \tau d\tau \right] \right\}$$

$$= \frac{1}{T} \int_0^T \left\{ \lim_{M \to \infty} \left[\frac{1}{M} \sum_{m=1}^M R(y_m) \right] \right\} \cos n\omega_T \tau d\tau$$

$$= \frac{1}{T} \int_0^T \left[\frac{E(\theta)}{T} \int_0^T f(t + \tau) dt - \frac{E(\theta)}{T} \int_0^T f(t + \tau) dt + \frac{E(\theta)}{T} \int_0^T f(t) dt \right.$$

$$\left. - \frac{E[\theta]}{T} \int_0^T f(t) dt \right] \cos n\omega_T \tau d\tau = 0 \quad .$$

Summing $\hat{\Phi}_m(n\omega_T)$ for $m = 1, 2, \ldots, M$, and taking the limit as $M \to \infty$, we establish the first part of the theorem—*i.e.*,

8

$$\lim_{M \to \infty} \overline{\{\Phi_M(n\omega_T)\}} = \lim_{M \to \infty} \left\{ \frac{1}{M} \sum_{m=1}^{M} \hat{\Phi}_m(n\omega_T) \right\}$$

$$= \Phi_f(n\omega_T) + \frac{1}{T} \int_0^T \left[\lim_{M \to \infty} \left\{ \frac{1}{M} \sum_{m=1}^{M} \hat{\psi}_{\phi_m}(\tau) \right\} \right] \cos n\omega_T \tau \, d\tau \quad .$$

Now to consider the limit as $T \to \infty$ we note that

$$\lim_{T \to \infty} \{\psi_{\theta_m}(\tau)\} = \lim_{T \to \infty} \left\{ \frac{1}{T} \int_0^T \theta_m(t)\theta_m(t+\tau)dt - \frac{1}{T^2} \int_0^T \theta_m(t)dt \int_0^T \theta_m(t+\tau)dt \right\} \quad .$$

From Definition 3 this is equivalent to

$$\lim_{T \to \infty} \{\hat{\psi}_{\theta_m}(\tau)\} = \lim_{T \to \infty} \{E[\theta_m(t)\theta_m(t+\tau)] - \hat{E}[\theta_m(t)]\hat{E}[\theta_m(t+\tau)]\}$$

and by Condition [B] and Theorem 1,

$$\lim_{T \to \infty} \{\hat{\psi}_{\theta_m}(\tau)\} = E[\theta(t)\theta(t+\tau)] - E^2[\theta] = \psi_\theta(\tau) \quad .$$

Now consider the limit as $T \to \infty$ in the term

$$\lim_{M \to \infty} \left\{ \frac{1}{M} \sum_{m=1}^{M} \left[\frac{1}{T} \int_0^T \lim_{T \to \infty} \{\hat{\psi}_{\theta_m}(\tau)\} \cos n\omega_T \tau \, d\tau \right] \right\} \quad .$$

$$= \lim_{M \to \infty} \left\{ \frac{1}{M} \sum_{m=1}^{M} \left[\frac{1}{T} \int_0^T \psi_\theta(\tau) \cos n\omega_T \tau \, d\tau \right] \right\}$$

$$= \Phi_\theta(n\omega_T) \text{ as a result of Theorem 2} \quad .$$

Thus $\lim_{M \to \infty} \lim_{T \to \infty} \overline{\{\Phi_M(n\omega_T)\}} = \Phi_f(n\omega_T) + \Phi_\theta(n\omega_T)$ and the proof of Theorem 3 is concluded.

As given by Theorem 2, $\Phi_f(n\omega_T)$ was defined with respect to the time of observation, T; and the calculated frequencies are multiples (harmonics) of the fundamental frequency, ω_T. However, suppose $\{Y(t)\}$ is stationary where $f(t)$ is a periodic function with fundamental period $T_0 = 2\pi/\omega_0$. It is then desirable to know the relation between the calculated frequencies and the harmonics of ω_0. Since

$$\Phi_f(n\omega_0) \ = \ \frac{1}{T_0} \int_0^{T_0} \psi_{fN}(\tau) \ \cos n\omega_0\tau d\tau$$

then

$$\Phi_f\left(\frac{n}{N}\omega_0\right) \ = \ \frac{1}{NT_0} \int_0^{NT_0} \psi_{fN}(\tau) \ \cos \frac{n}{N} \omega_0\tau d\tau$$

will exhibit the fundamental frequency, ω_0, when $n = N$, and will exhibit harmonics or multiples of ω_0 when $n = 2N$, $3N$, $4N$, ... The notation ψ_{fN} is shorthand for

$$\psi_{fN}(\tau) \ = \ \frac{1}{NT_0} \int_0^{NT_0} f(t)f(t + \tau)dt \ - \ f^2$$

where

$$f \ = \ \frac{1}{NT_0} \int_0^{NT_0} f(t)dt \ = \ \frac{1}{NT_0} \int_0^{NT_0} f(t + \tau)dt \quad .$$

The following theorem establishes a relation between the calculated and actual frequencies.

THEOREM 4

For $f(t) \in L_2$, a periodic function with fundamental angular frequency ω_0 and fundamental period T_0,

$$\lim_{T \to NT_0} \{\Phi_f(n\omega_T)\} \ = \ \Phi_f\left(\frac{n}{N}\omega_0\right)$$

and

$$\left| \Phi_f(n\omega_T) - \frac{N^2}{(N+\beta)^2} \Phi_f\left(\frac{n}{N}\omega_0\right) \right| \le f_M^2 \, \beta \, \frac{(5N+2\beta)}{(N+\beta)^2}$$

where

$$T = (N+\beta)T_0, \quad N \ge 1, \quad 0 \le \beta < 1, \quad \text{and} \quad f_M = \max_{0 \le t \le T_0} |f(t)| \quad .$$

Proof:

Take $\psi_f(\tau) = \frac{1}{T}\int_0^T f(t)f(t+\tau)dt - \frac{1}{T^2}\int_0^T f(t)dt \int_0^T f(t+\tau)dt \quad .$

We may write each integral in two parts, as follows:

$$\psi_f(\tau) = \frac{1}{T}\int_0^{NT_0} f(t)f(t+\tau)dt + \frac{1}{T}\int_{NT_0}^T f(t)f(t+\tau)dt$$

$$- \frac{1}{T^2}\left\{\left[\int_0^{NT_0} f(t)dt + \int_{NT_0}^T f(t)dt\right]\left[\int_0^{NT_0} f(t+\tau)dt + \int_{NT_0}^T f(t+\tau)dt\right]\right\}$$

$$= \frac{N}{N+\beta}\frac{1}{NT_0}\int_0^{NT_0} f(t)f(t+\tau)dt - \frac{N}{N+\beta}f^2 + \frac{N}{N+\beta}f^2 + \frac{1}{T}\int_{NT_0}^T f(t)f(t+\tau)dt$$

$$- \frac{1}{T^2}\left\{\left[NT_0 f + \int_{NT_0}^T f(t)dt\right]\left[NT_0 f + \int_{NT_0}^T f(t+\tau)dt\right]\right\}$$

11

$$= \frac{N}{N+\beta}\psi_{fN} + \frac{\beta N}{(N+\beta)^2} f^2 + \frac{1}{T}\int_{NT_0}^{T} f(t)f(t+\tau)dt$$

$$- \frac{1}{T^2}\left\{ NT_0 f \int_{NT_0}^{T} [f(t) + f(t+\tau)]dt + \int_{NT_0}^{T} f(t)dt \int_{NT_0}^{T} f(t+\tau)dt \right\} \quad .$$

If this expression is substituted for $\psi_f(\tau)$ in the definition of $\Phi_f(n\omega_T)$ then

$$\Phi_f(n\omega_T) = \frac{N^2}{(N+\beta)^2}\Phi_f\left(\frac{n}{N+\beta}\omega_0\right) + \frac{N}{(N+\beta)T}\int_{NT_0}^{T} \psi_{fN}(\tau) \cos n\omega_T \tau d\tau$$

$$+ \frac{1}{T}\int_0^T \left\{ \frac{\beta N}{(N+\beta)^2} f^2 + \frac{1}{T}\int_{NT_0}^{T} f(t)f(t+\tau)dt \right.$$

$$\left. - \frac{1}{T^2}\left[NT_0 f \int_{NT_0}^{T} [f(t+\tau) + f(t)]dt + \int_{NT_0}^{T} f(t)dt \int_{NT_0}^{T} f(t+\tau)dt \right] \right\} \cos n\omega_T \tau d\tau \quad .$$

Thus, since $\lim_{T\to NT_0} \beta = 0$, taking the limit as $T \to NT_0$ establishes the first part of the theorem:

$$\lim_{T\to NT_0} \{\Phi_f(n\omega_T)\} = \Phi_f\left(\frac{n}{N}\omega_0\right) \quad .$$

Next, consider upper bounds for each of the three last terms in the expression for $\Phi_f(n\omega_T)$:

$$\left| \frac{N}{(N+\beta)T}\int_{NT_0}^{T} \psi_{fN}(\tau) \cos n\omega_T \tau d\tau \right| = \left| \frac{N}{(N+\beta)T}\int_{NT_0}^{T} \left[\frac{1}{NT_0}\int_0^{NT_0} f(t)f(t+\tau)dt - f^2 \right] \cos n\omega_T \tau d\tau \right|$$

$$\leq \frac{N^2}{(N+\beta)^2}\frac{1}{NT_0}\int_{NT_0}^{(N+\beta)T_0} 2f_M^2 \left| \cos \frac{n\omega_0}{N+\beta}\tau \right| d\tau \leq \frac{2\beta N}{(N+\beta)^2} f_M^2 \quad ,$$

12

$$\left| \frac{1}{T} \int_0^T \left\{ \frac{\beta N}{(N+\beta)^2} f^2 \right\} \cos n\omega_T \tau \, d\tau \right| = \left| \frac{\beta N}{(N+\beta)^3 T_0} f^2 \int_0^{(N+\beta)T_0} \cos \frac{n}{N+\beta} \omega_0 \tau \, d\tau \right| = 0 \quad ,$$

and finally

$$\left| \frac{1}{T} \int_0^T \left\{ \frac{1}{T} \int_{NT_0}^T f(t)f(t+\tau) \right. \right.$$

$$\left. - \frac{1}{T^2} \left[NT_0 f \int_{NT_0}^T [f(t+\tau)+f(t)]dt + \int_{NT_0}^T f(t)dt \int_{NT_0}^T f(t+\tau)dt \right] \right\} \cos n\omega_T \tau \, d\tau \right|$$

$$\leq \frac{1}{(N+\beta)T_0} \int_0^{(N+\beta)T_0} \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f_M^2 dt + \frac{N}{(N+\beta)^2 T_0} f_M \int_{NT_0}^{(N+\beta)T_0} 2f_M dt \right.$$

$$\left. + \frac{1}{(N+\beta)^2 T_0^2} \int_{NT_0}^{(N+\beta)T_0} f_M dt \int_{NT_0}^{(N+\beta)T_0} f_M dt \right] \left| \cos \frac{n}{N+\beta}\omega_0\tau \right| \, d\tau$$

$$\leq \left[\frac{\beta}{N+\beta} f_M^2 + \frac{2N\beta f_M^2}{(N+\beta)^2} + \frac{\beta^2 f_M^2}{(N+\beta)^2} \right] = f_M^2 \frac{(3N\beta+\beta^2)}{(N+\beta)^2} \quad .$$

Thus

$$\left| \Phi_f(n\omega_T) - \frac{N^2}{(N+\beta)^2} \Phi_f\left(\frac{n}{N+\beta}\omega_0 \right) \right| \leq f_M^2 \frac{\beta(5N+2\beta)}{(N+\beta)^2}$$

and Theorem 4 is proved.

A corollary to Theorem 4 gives the relations between $\psi_f(\tau)$ and $\psi_{f1}(\tau)$, $N = 1$, and between $\Phi_f(n\omega_T)$ and $\Phi_f(n\omega_0)$ where $0 < T \leq T_0$. For this investigation set $T = \gamma T_0$ or $\omega_T = \omega_0/\gamma$ where $0 < \gamma \leq 1$. Remembering that

13

$$\psi_{f1}(\tau) \;\; = \;\; \frac{1}{T_0} \int_0^{T_0} f(t)f(t+\tau)dt \; - \; f^2$$

where

$$f \;\; = \;\; \frac{1}{T_0}\int_0^{T_0} f(t)dt \;\; = \;\; \frac{1}{T_0}\int_0^{T_0} f(t+\tau)dt$$

$$\vdots$$

then the corollary may be stated as follows.

Corollary:

For $f(t) \in L_2$, a periodic function with fundamental frequency ω_0 and period T_0, then

$$\lim_{T \to T_0} \Phi_f(n\omega_T) \;\; = \;\; \Phi_f(n\omega_0)$$

and

$$\left| \; \Phi_f(n\omega_T) \; - \; \frac{1}{\gamma^2} \; \Phi_f\!\left(\frac{n}{\gamma}\,\omega_0\right) \; \right| \;\; \leq \;\; 5 f_M^2(\gamma-1)/\gamma^2$$

where

$$f_* \;\; = \;\; \max_{0 \leq t \leq T_0}\left|f(t)\right| \;\; = \;\; \max_{0 \leq t \leq T_0}\left|f(t+\tau)\right| \quad \text{and} \quad 0 \leq \tau \leq T_0 \quad .$$

Proof:

$$\psi_f(\tau) \;\; = \;\; \frac{1}{T}\int_0^T f(t)f(t+\tau)dt \; - \; \frac{1}{T^2}\int_0^T f(t)dt \int_0^T f(t+\tau)dt$$

$$= \;\; \frac{1}{\gamma T_0}\int_0^{T_0} f(t)f(t+\tau)dt \; + \; \frac{1}{\gamma T_0}\int_{T_0}^{\gamma T_0} f(t)f(t+\tau)dt$$

$$- \; \frac{1}{(\gamma T_0)^2}\left[\int_0^{T_0} f(t)dt + \int_{T_0}^{\gamma T_0} f(t)dt\right]\left[\int_0^{T_0} f(t+\tau)dt + \int_{T_0}^{\gamma T_0} f(t+\tau)dt\right] .$$

14

$$= \frac{1}{\gamma}\psi_{f1}(\tau) + \frac{\gamma - 1}{\gamma^2} f^2 + \frac{1}{\gamma T_0} \int_{T_0}^{\gamma T_0} f(t)f(t + \tau)dt$$

$$- \frac{1}{(\gamma T_0)^2} \left[T_0 f \int_{T_0}^{\gamma T_0} [f(t + \tau) + f(t)]dt + \int_{T_0}^{\gamma T_0} f(t)dt \int_{T_0}^{\gamma T_0} f(t + \tau)dt \right] \quad .$$

Now since

$$\Phi_f(n\omega_T) = \frac{1}{T} \int_0^T \psi_f(\tau) \cos n\omega_T \tau d\tau = \frac{1}{\gamma T_0} \int_0^{\gamma T_0} \psi_f(\tau) \cos \frac{n\omega_0}{\gamma}\tau d\tau \quad ,$$

substituting the preceding expression for $\psi_f(\tau)$ into $\Phi_f(n\omega_T)$ gives

$$\Phi_f(n\omega_T) = \frac{1}{\gamma T_0} \int_0^{\gamma T_0} \left\{ \frac{1}{\gamma} \psi_{f1}(\tau) + \frac{\gamma - 1}{\gamma^2} f^2 + \frac{1}{\gamma T_0} \int_{T_0}^{\gamma T_0} f(t)f(t + \tau)dt \right.$$

$$\left. - \frac{1}{\gamma^2 T_0} f \int_{T_0}^{\gamma T_0} [f(t+\tau) + f(t)]dt - \frac{1}{(\gamma T_0)^2} \int_{T_0}^{\gamma T_0} f(t)dt \int_{T_0}^{\gamma T_0} f(t+\tau)dt \right\} \cos \frac{n\omega_0}{\gamma} \tau d\tau$$

$$= \frac{1}{\gamma^2} \Phi_f\left(\frac{n}{\gamma} \omega_0\right) + \frac{1}{\gamma^2 T_0} \int_{T_0}^{\gamma T_0} \psi_{f1}(\tau) \cos \frac{n\omega_0}{\gamma} \tau d\tau$$

$$+ \frac{1}{(\gamma T_0)^2} \int_0^{\gamma T_0} \int_{T_0}^{\gamma T_0} f(t)f(t + \tau)dt \cos \frac{n\omega_0}{\gamma} \tau d\tau$$

$$- \frac{1}{\gamma^3 T_0^2} f \int_0^{\gamma T_0} \int_{T_0}^{\gamma T_0} [f(t + \tau) + f(t)]dt \cos \frac{n\omega_0}{\gamma} \tau d\tau +$$

$$-\frac{1}{(\gamma T_0)^3} \int\limits_0^{\gamma T_0} \left[\int\limits_{T_0}^{\gamma T_0} f(t)dt \int\limits_{T_0}^{\gamma T_0} f(t+\tau)dt \right] \cos \frac{n\omega_0}{\gamma} \tau d\tau$$

and

$$\lim_{T \to T_0} \Phi_f(n\omega_T) = \Phi_f(n\omega_0)$$

since $\lim\limits_{T \to T_0} \gamma = 1$, and the first part of the corollary is established. Next, consider upper bounds for the individual terms in the expression for $\Phi_f(n\omega_T)$

$$\left| \frac{1}{\gamma^2 T_0} \int\limits_{T_0}^{\gamma T_0} \psi_{f1}(\tau) \cos \frac{n\omega_0}{\gamma} \tau d\tau \right| = \left| \frac{1}{\gamma^2 T_0} \int\limits_{T_0}^{\gamma T_0} \left[\frac{1}{T_0} \int\limits_0^{T_0} f(t)f(t+\tau)dt - f^2 \right] \cos \frac{n\omega_0}{\gamma} \tau d\tau \right|$$

$$\leq \frac{1}{\gamma^2 T_0} \int\limits_{\gamma T_0}^{T_0} 2f_M^2 \left| \cos \frac{n\omega_0}{\gamma} \tau \right| d\tau \leq \frac{(1-\gamma)}{\gamma^2} 2f_M^2 \quad ,$$

$$\left| \frac{1}{(\gamma T_0)^2} \int\limits_0^{\gamma T_0} \int\limits_{T_0}^{\gamma T_0} f(t)f(t+\tau)dt \cos \frac{n\omega_0}{\gamma} \tau d\tau \right| \leq \frac{1}{(\gamma T_0)^2} \int\limits_0^{\gamma T_0} (1-\gamma)T_0 f_M^2 \left| \cos \frac{n\omega_0}{\gamma} \tau \right| d\tau$$

$$\leq \frac{\gamma(1-\gamma)}{\gamma^2} f_M^2 \quad ,$$

$$\left| \frac{1}{\gamma^3 T_0^2} f \int\limits_0^{\gamma T_0} \int\limits_{T_0}^{\gamma T_0} [f(t+\tau)+f(t)]dt \cos \frac{n\omega_0}{\gamma} \tau d\tau \right| \leq \frac{2f_M^2(1-\gamma)}{\gamma^3 T_0} \int\limits_0^{\gamma T_0} \left| \cos \frac{n\omega_0}{\gamma} \tau \right| d\tau$$

$$\leq \frac{(1-\gamma)}{\gamma^2} 2f_M^2 \quad ,$$

16

and for the final term

$$\left| \frac{1}{(\gamma T_0)^3} \int\limits_0^{\gamma T_0} \left[\int\limits_{T_0}^{\gamma T_0} f(t)dt \int\limits_{T_0}^{\gamma T_0} f(t + \tau)dt \right] \cos \frac{n\omega_0}{\gamma} \tau d\tau \right|$$

$$\leq \frac{(1 - \gamma)^2 f_M^2}{\gamma^3 T_0} \int\limits_0^{\gamma T_0} \left| \cos \frac{n\omega_0}{\gamma} \tau \right| d\tau \leq \frac{(1 - \gamma)^2}{\gamma^2} f_M^2 \quad .$$

The proof of the corollary is completed since

$$\left| \Phi_f(n\omega_T) - \frac{1}{\gamma^2} \Phi\left(\frac{n}{\gamma} \omega_0 \right) \right| \leq \frac{2(1 - \gamma)}{\gamma^2} f_M^2 + \frac{\gamma(1 - \gamma)}{\gamma^2} f_M^2 + \frac{2(1 - \gamma)}{\gamma^2} f_M^2 + \frac{(1-\gamma)^2}{\gamma^2} f_M^2$$

$$\leq f_M^2 \frac{(1 - \gamma)}{\gamma^2} (4 + \gamma + 1 - \gamma) = 5 f_M^2 \frac{(1 - \gamma)}{\gamma^2} \quad .$$

The power-spectral-density techniques are applicable to non-stationary processes consisting of member functions which may be reduced to the form $y_n(t) = \theta_n(t) + f(t)$. For example, consider a non-stationary process $\{X(t)\}$ consisting of member functions

$$x_n(t) = \lambda_n(t)g(t)$$

where $\lambda_n(t)$ satisfies Condition [B] and Parts 1 and 2 of Condition [A] and $g(t)$ satisfies Part 3 of Condition [A]. Then by setting

$$y_n(t) = \ln x_n(t)$$

$$\theta_n(t) = \ln \lambda_n(t)$$

and

$$f(t) = \ln g(t)$$

17

the frequency analysis of the product $x_\blacksquare(t) = \lambda_\blacksquare(t)g(t)$ may be treated as the analysis of the sum

$$ln\ \lambda_\blacksquare(t) + ln\ g(t) = ln\ x_\blacksquare(t) = y_\blacksquare(t) = \theta_\blacksquare(t) + f(t)$$

providing the dominant frequencies of $ln\ x_\blacksquare(t)$ are the same as those for $x_\blacksquare(t)$. This restriction is stated mathematically for functions $x_\blacksquare(t)$, observed for $0 \leq t \leq 2T$, satisfying the following theorem.

THEOREM 5

Given $x_\blacksquare(t)$ expandable in a Fourier series as

$$x_\blacksquare(t) = \frac{a_0}{2} + \sum_{n=1}^{\infty} a_n \cos n\omega_T t + b_n \sin n\omega_T t = \frac{a_0}{2}[1 + z_\blacksquare(t)]$$

where the a_n and b_n are random coefficients, $a_0 > 0$, $\omega_T T = 2\pi$, and $|z_\blacksquare(t)| \ll 1$, then the dominant frequencies contained in the set $n\omega_T$ for $n = 1, 2, \ldots$ are in the same order for $x_\blacksquare(t)$ and $ln\ x_\blacksquare(t)$.

Proof:

Set $ln\ x_\blacksquare(t) = ln\ \dfrac{a_0}{2} + ln\ [1 + z_\blacksquare(t)]$

where

$$z_\blacksquare(t) = \frac{2}{a_0}\left[\sum_{n=1}^{\infty} a_n \cos n\omega_T t + b_n \sin n\omega_T t\right] \quad .$$

Since $|z_\blacksquare(t)| < 1$ and $a_0 > 0$, then $ln\ [1 + z_\blacksquare(t)]$ may be expanded in powers of $z_\blacksquare(t)$ and therefore

$$ln\ x_\blacksquare(t) = ln\ \frac{a_0}{2} + \sum_{n=1}^{\infty} \frac{(-1)^{n-1}}{n} z_\blacksquare^n(t) \quad .$$

The condition $|z_\blacksquare(t)| \ll 1$ is used to imply that the first term of the power series is the dominant term:

18

$$\ln x_{\scriptscriptstyle M}(t) \; \doteq \; \ln \frac{a_0}{2} + z_{\scriptscriptstyle M}(t)$$

$$\doteq \; \ln \frac{a_0}{2} + \frac{2}{a_0} \Big[\sum_{n=1}^{\infty} a_n \cos n\omega_T t + b_n \sin n\omega_T t \Big]$$

which provides the same ordering for the magnitudes of the $a_n^2 + b_n^2$, $n \geq 1$, for $\ln x_{\scriptscriptstyle M}(t)$ as for $x_{\scriptscriptstyle M}(t)$.

Thus the analysis of $x_{\scriptscriptstyle M}(t) = \lambda_{\scriptscriptstyle M}(t)g(t)$ may be performed on $y_{\scriptscriptstyle M}(t) = \ln x_{\scriptscriptstyle M}(t) = \theta_{\scriptscriptstyle M}(t) + f(t)$ by the usual methods of taking the Fourier cosine transform of the autocovariance of $y_{\scriptscriptstyle M}(t)$. This is true because the choice of $\omega_T = 2\pi/T$ for the fundamental frequency of $g(t)$ carries over into the analysis, since $g(t)$ and $f(t) = \ln g(t)$ both have the same fundamental frequency.

Note that the condition $|z_{\scriptscriptstyle M}(t)| \ll 1$ is equivalent to

$$\frac{a_0}{2} \gg \sum_{n=1}^{\infty} \left| [a_n^2 + b_n^2]^{\frac{1}{2}} \right|$$

That is, the dc component of the signal must be greater than the maximum amplitude of the sum of the non-dc component of the signal so that the logarithmic transformation produces a real function which is physically interpretable.

III ADDITIONAL THEOREMS

Consider a periodic function $f(t)$ with fundamental frequency ω_0 and period T_0 which is expandable in a Fourier series—i.e.,

$$f(t) = \frac{a_0}{2} + \sum_{n=1}^{\infty} a_n \cos n\omega_0 t + b_n \sin n\omega_0 t \quad .$$

The frequency spectrum of $f(t)$ may be obtained from the product of the finite Fourier transform with the finite conjugate Fourier transform. That is, as the finite Fourier transform is defined by

$$F(n\omega_0) = \frac{1}{T_0} \int_0^{T_0} f(t) e^{in\omega_0 t} dt$$

and as the finite conjugate Fourier transform is defined by

$$F^*(n\omega_0) = \frac{1}{T_0} \int_0^{T_0} f(t) e^{-in\omega_0 t} dt$$

the frequency spectrum is given by

$$\left| F(n\omega_0) \right|^2 = F(n\omega_0) F^*(n\omega_0) = \frac{a_n^2 + b_n^2}{4} \quad .$$

For periodic functions $f(t) \epsilon L_2$, $\left| F(n\omega_0) \right|^2 = \Phi_f(n\omega_0)$ when $\Phi_f(n\omega_0)$ is evaluated for $f(t)$ observed over the time interval $0 \leq t \leq T_0$. However, $\left| F(n\omega_0) \right|^2$ is functionally different from $\Phi(n\omega_0)$, and other methods of calculating the frequency spectrum of $f(t)$ may be investigated (differing from the power-spectral-density function described in the previous sections). It is hoped that these methods can be extended to non-stationary stochastic processes $\{Y(t)\}$ satisfying Conditions [A] and [B].

Consider a theorem which parallels Theorem 4. That is, let $f(t)$ be observed for $0 \leq t \leq T$ where $T = (N + \beta)T_0$, $N \geq 1$ and $0 \leq \beta < 1$. Again, define $\omega_T T = 2\pi$ and let

$$F(n\omega_T) = \frac{1}{T} \int_0^T f(t)e^{in\omega_T t}dt$$

and

$$F^*(n\omega_T) = \frac{1}{T} \int_0^T f(t)e^{-in\omega_T t}dt \quad .$$

Further, since

$$F(n\omega_0) = \frac{1}{T_0} \int_0^{T_0} f(t)e^{in\omega_0 t}dt$$

then

$$F\left(\frac{n}{N}\omega_0\right) = \frac{1}{NT_0} \int_0^{NT_0} f(t)e^{i(n/N)\omega_0 t}dt \quad .$$

Similarly,

$$F^*\left(\frac{n}{N}\omega_0\right) = \frac{1}{NT} \int_0^{NT_0} f(t)e^{-i(n/N)\omega_0 t}dt \quad ,$$

and the following theorem is stated and proved.

THEOREM 6

Given $f(t)$ periodic with fundamental frequency ω_0 and period T_0 and given $f(t) \epsilon L_2$ for $0 \leq t \leq T$, then

$$\left| F(n\omega_T)F^*(n\omega_T) - \left(\frac{N}{N+\beta}\right)^2 F\left(\frac{n}{N+\beta}\omega_0\right)F^*\left(\frac{n}{N+\beta}\omega_0\right) \right| \leq f_M^2 \frac{\beta(4N+\beta)}{(N+\beta)^2}$$

21

where

$$f_M = \max_{0 < t < T_0} \{|f(t)|\} \ .$$

Proof:

Substituting

$$e^{in\omega_T t} = \cos n\omega_T t + i \sin n\omega_T t$$

and

$$e^{-in\omega_T t} = \cos n\omega_T t - i \sin n\omega_T t$$

into $F(n\omega_T)F^*(n\omega_T)$ gives

$$F(n\omega_T)F^*(n\omega_T) = \left[\frac{1}{T}\int_0^T f(t)\cos n\omega_T t\,dt\right]^2 + \left[\frac{1}{T}\int_0^T f(t)\sin n\omega_T t\,dt\right]^2$$

$$= \left[\frac{1}{(N+\beta)T_0}\int_0^{NT_0} f(t)\cos\frac{n\omega_0 t}{N+\beta}\,dt\right.$$

$$+ \left.\frac{1}{(N+\beta)T_0}\int_{NT_0}^{(N+\beta)T_0} f(t)\cos\frac{n\omega_0 t}{N+\beta}\,dt\right]^2$$

$$+ \left[\frac{1}{(N+\beta)T_0}\int_0^{NT_0} f(t)\sin\frac{n\omega_0 t}{N+\beta}\,dt\right.$$

$$+ \left.\frac{1}{(N+\beta)T_0}\int_{NT_0}^{(N+\beta)T_0} f(t)\sin\frac{n\omega_0 t}{N+\beta}\,dt\right]^2$$

$$F(n\omega_T)F^*(n\omega_T) \quad = \quad \frac{N^2}{(N + \beta)^2} \, F\!\left(\frac{n}{N + \beta}\,\omega_0\right)F^*\!\left(\frac{n}{N + \beta}\,\omega_0\right)$$

$$+ \left[\frac{1}{(N + \beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f(t) \, \cos\frac{n\omega_0 t}{N + \beta} \, dt\right]^2$$

$$+ \left[\frac{1}{(N + \beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f(t) \, \sin\frac{n\omega_0 t}{N + \beta} \, dt\right]^2$$

$$+ 2\left[\frac{1}{(N + \beta)T_0} \int_{0}^{NT_0} f(t) \, \cos\frac{n\omega_0 t}{N + \beta} \, dt\right] \cdot$$

$$\cdot \left[\frac{1}{(N + \beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f(t) \, \cos\frac{n\omega_0 t}{N + \beta} \, dt\right]$$

$$+ 2\left[\frac{1}{(N + \beta)T_0} \int_{0}^{NT_0} f(t) \, \sin\frac{n\omega_0 t}{N + \beta} \, dt\right]$$

$$\cdot \left[\frac{1}{(N + \beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f(t) \, \sin\frac{n\omega_0 t}{N + \beta} \, dt\right]$$

23

By Schwartz's inequality

$$(I)^2 = \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f(t) \cos \frac{n\omega_0 t}{N+\beta} dt\right]^2$$

$$\leq \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} \cdot [f(t)]^2 dt\right] \cdot \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} \left[\cos \frac{n\omega_0 t}{N+\beta}\right]^2 dt\right]$$

and

$$(II)^2 = \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f(t) \sin \frac{n\omega_0 t}{N+\beta} dt\right]^2$$

$$\leq \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} [f(t)]^2 dt\right]\left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} \left[\cos \frac{n\omega_0 t}{N+\beta}\right]^2 dt\right].$$

Thus,

$$(I)^2 + (II)^2 \leq \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N+\beta)T_0} f^2(t) dt\right] \cdot \left[\frac{1}{(N+\beta)T_0} \int_{NT_0}^{(N\tau\beta)T_0} dt\right]$$

$$\leq f_M^2 \left(\frac{\beta}{N+\beta}\right)^2$$

Since

$$\left|\cos \frac{n\omega_0 t}{N+\beta}\right| \leq 1, \quad \left|\sin \frac{n\omega_0 t}{N+\beta}\right| \leq 1,$$

and

$$\left|f(t)\right| \leq f_M,$$

24

then

$$\left| 2\left[\frac{1}{(N+\beta)T_0}\int_0^{NT_0} f(t)\ \cos\frac{n\omega_0 t}{N+\beta}\ dt\right]\cdot\left[\frac{1}{(N+\beta)T_0}\int_{NT_0}^{(N+\beta)T_0} f(t)\ \cos\frac{n\omega_0 t}{N+\beta}dt\right]\right.$$

$$+\ 2\left[\frac{1}{(N+\beta)T_0}\int_0^{NT_0} f(t)\ \sin\frac{n\omega_0 t}{N+\beta}\ dt\right]$$

$$\left.\cdot\left[\frac{1}{(N+\beta)T_0}\int_{NT_0}^{(N+\beta)T_0} f(t)\ \sin\frac{n\omega_0 t}{N+\beta}\ dt\right]\right|\ \leq\ 4f_M^2\ \frac{\beta N}{(N+\beta)^2}$$

and

$$\left| F(n\omega_T)F^*(n\omega_T)\ -\ \left(\frac{N}{N+\beta}\right)^2\ F\left(\frac{n}{N+\beta}\ \omega_0\right)F^*\left(\frac{n}{N+\beta}\ \omega_0\right)\right|$$

$$\leq\ f_a^2\ \frac{\beta(4N+\beta)}{(N+\beta)^2}$$

As in the case of Theorem 4, a corollary to Theorem 6 exists. The statement of the corollary follows without proof since the proof parallels that for the corollary to Theorem 4.

Corollary:

Given $f(t)$ periodic with fundamental frequency ω_0 and period T_0 and given $f(t)\epsilon L_2$ for $0\leq t\leq T$, then

$$\left| F(n\omega_T)F^*(n\omega_T)\ -\frac{1}{\gamma^2}\ f\left(\frac{n}{\gamma}\ \omega_0\right)F^*\left(\frac{n}{\gamma}\ \omega_0\right)\right|\leq f_M^2\ \frac{(5-\gamma)(1-\gamma)}{\gamma^2}$$

where

$$f_M\ =\ \underset{0\leq t\leq T_0}{\text{Max}}\ \{|f(t)|\}\ ,\ \ T=\gamma_0\ ,$$

25

and

$$0 < \gamma \leq 1 \quad .$$

For stochastic processes, consider the process $\{Y(t)\}$ containing member functions $y_n(t) = \theta_n(t) + f(t)$ satisfying conditions [A] and [B] as before; and define a sample function $g_n(t)$ as follows.

DEFINITION 6

Let a sample function $g_n(t)$ be constructed for each member function $y_n(t)$ by

$$g_n(t) = y_n(t) - A_{y_n(t)} = \theta_n(t) + f(t) - [A_{\theta_n(t)} + A_{f(t)}]$$

$$= [\theta_n(t) - A_{\theta_n(t)}] + [f(t) - A_{f(t)}]$$

where

$$A_{y_n(t)} = \frac{1}{T} \int_0^T y_n(t) dt$$

$$A_{\theta_n(t)} = \frac{1}{T} \int_\theta^T \theta_n(t) dt$$

and

$$A_{f(t)} = \frac{1}{T} \int_0^T f(t) dt \quad .$$

The Fourier transform of $g_n(t)$ for $0 \leq t \leq T$ and for $\theta_n(t) \epsilon L_2$ and $f(t) \epsilon L_2$ is given by

$$F_{\text{m}}(n) = \frac{1}{T}\int_0^T g_{\text{m}}(t)e^{in\omega_T T}dt$$

$$= \frac{1}{T}\int_0^T [\theta_{\text{m}}(t) - A_{\theta_{\text{m}}(t)}]e^{in\omega_T t}dt + \frac{1}{T}\int_0^T [f(t) - A_{f(t)}]e^{in\omega_T t}dt$$

where $\omega_T T = 2\pi$; and, similarly, the conjugate transform is given by

$$F_{\text{m}}^*(n) = \frac{1}{T}\int_0^T g_{\text{m}}(t)e^{-in\omega_T t}dt$$

$$= \frac{1}{T}\int_0^T [\theta_{\text{m}}(t) - A_{\theta_{\text{m}}(t)}]e^{-in\omega_T t}dt + \frac{1}{T}\int_0^T [f(t) - A_{f(t)}]e^{-in\omega_T t}dt \quad .$$

The expected value of the power spectrum is given by the mathematical expectation of the ensemble of the products of the Fourier transform of each stochastic member function with its conjugate transform—*i.e.*,

$$E[|F(n)|^2] = E[F_{\text{m}}(n)F_{\text{m}}^*(n)]$$

$$= E\left[\left\{\frac{1}{T}\int_0^T \theta_{\text{m}}(t)\cos n\omega_T t\,dt\right\}^2 - 2\left\{\frac{1}{T}\int_0^T A_{\theta_{\text{m}}(t)}\cos n\omega_T t\,d\right\}\right.$$

$$\left. \cdot \left\{\frac{1}{T}\int_0^T \theta_{\text{m}}(t)\cos n\omega_T t\,dt\right\} + \left\{\frac{1}{T}\int_0^T A_{\theta_{\text{m}}(t)}\cos n\omega_T t\,dt\right\}^2\right]$$

$$+ E\left[\left\{\frac{1}{T}\int_0^T \theta_{\text{m}}(t)\sin n\omega_T t\,dt\right\}^2 - 2\left\{\frac{1}{T}\int_0^T A_{\theta_{\text{m}}(t)}\sin n\omega_T t\,dt\right\}\right.$$

$$\left. \cdot \left\{\frac{1}{T}\int_0^T \theta_{\text{m}}(t)\sin n\omega_T t\,dt\right\} + \left\{\frac{1}{T}\int_0^T A_{\theta_{\text{m}}(t)}\sin n\omega_T t\,dt\right\}^2\right]$$

$$+ \left\{\frac{1}{T}\int_0^T [f(t) - A_{f(t)}]\cos n\omega_T t\,dt\right\}^2 + \left\{\frac{1}{T}\int_0^T [f(t) - A_{f(t)}]\sin n\omega_T t\,dt\right\}^2 \quad .$$

Since $E[\theta_{\pmb{\pi}}(t)] = E[A_{\theta_{\pmb{\pi}}(t)}]$, the preceding expression reduces to

$$E[|F(n)|^2] = E\left[\left\{\frac{1}{T}\int_0^T \theta_{\pmb{\pi}}(t)\cos n\omega_T t\,dt\right\}^2\right] - E^2[\theta_{\pmb{\pi}}(t)]\left\{\frac{1}{T}\int_0^T \cos n\omega_T t\,dt\right\}^2$$

$$+ E\left[\left\{\frac{1}{T}\int_0^T \theta_{\pmb{\pi}}(t)\sin n\omega_T t\,dt\right\}^2\right] - E^2[\theta_{\pmb{\pi}}(t)]\left\{\frac{1}{T}\int_0^T \sin n\omega_T t\,dt\right\}^2$$

$$+ \left\{\frac{1}{T}\int_0^T [f(t) - A_{f(t)}]\cos n\omega_T t\,dt\right\}^2$$

$$+ \left\{\frac{1}{T}\int_0^T [f(t) - A_{f(t)}]\sin n\omega_T t\,dt\right\}^2 \quad .$$

Next, consider

$$E\left[\left\{\frac{1}{T}\int_0^T \theta_{\pmb{\pi}}(t)\cos n\omega_T t\,dt\right\}^2\right] = E\left[\frac{1}{T^2}\int_0^T\int_0^T \theta_{\pmb{\pi}}(t)\theta_{\pmb{\pi}}(\tau)[\cos n\omega_T t][\cos n\omega_T \tau]\,dt\,d\tau\right]$$

$$= E[\theta_{\pmb{\pi}}^2(t)] \cdot \left\{\frac{1}{T}\int_0^T \cos n\omega_T t\,dt\right\}^2$$

and, similarly,

$$E\left[\left\{\frac{1}{T}\int_0^T \theta_{\pmb{\pi}}(t)\sin n\omega_T t\,dt\right\}^2\right] = E[\theta_{\pmb{\pi}}^2(t)] \cdot \left\{\frac{1}{T}\int_0^T \sin n\omega_T t\,dt\right\}^2 \quad .$$

Thus,

$$
E[|F(n)|^2] = \left[\left\{ \frac{1}{T} \int_0^T \cos n\omega_T t\, dt \right\}^2 + \left\{ \frac{1}{T} \int_0^T \sin n\omega_T t\, dt \right\}^2 \right] \cdot \left[E[\theta^2] - E^2[\theta] \right]
$$

$$
+ \left\{ \frac{1}{T} \int_0^T [f(t) - A_{f(t)}] \cos n\omega_T t\, dt \right\}^2
$$

$$
+ \left\{ \frac{1}{T} \int_0^T [f(t) - A_{f(t)}] \sin n\omega_T t\, dt \right\}^2 \quad .
$$

Finally, since $\omega_T T = 2\pi$

$$
\frac{1}{T} \int_0^T \cos n\omega_T t\, dt = \begin{cases} 1 & \text{for } n = 0 \\ 0 & \text{for } n \geq 1 \end{cases} \quad .
$$

and

$$
\frac{1}{T} \int_0^T \sin n\omega_T t\, dt = 0 \quad \text{for all } n
$$

and the following theorem has been proved.

THEOREM 7

For the sample functions of Definition 6, the expected value of the power spectrum is separable into a stochastic component and a deterministic component — i.e.,

$$
|F(n)|^2 = |F_\theta|^2 + |F_f(n)|^2
$$

where

$$
|F_\theta|^2 = \begin{cases} E[\theta^2] - E^2[\theta] & \text{for } n = 0 \\ 0 & \text{for } n \geq 1 \end{cases}
$$

29

and

$$|F_f(n)|^2 = \left\{ \frac{1}{T} \int_0^T [f(t) - A_{f(t)}] \cos n\omega_T t \, dt \right\}^2$$

$$+ \left\{ \frac{1}{T} \int_0^T [f(t) - A_{f(t)}] \sin n\omega_T t \, dt \right\}^2 .$$

The result stated in this theorem is to be expected since $f(t)$ and the $\theta_m(t)$ are statistically independent.

In the following discussion, possible extensions for the use of transform methods are considered for the analysis of non-stationary deterministic functions $f(t) \epsilon L_2$. For example, let $f(t)$, $0 \le t \le T_0$, be defined by

$$f(t) = \alpha_0 \cos [\omega(t)t] = \alpha_0 \cos \left[\omega_0 \left(t + \frac{t^2}{T_0} \right) \right]$$

where

$$\omega(t) = \omega_0 \left(1 + \frac{t}{T_0} \right) \quad \text{and} \quad \omega_0 T_0 = 2\pi .$$

Define a transform by

$$F(n) = \frac{1}{T_0} \int_0^{T_0} f(t) e^{in\omega_0 \left(t + \frac{t^2}{T_0} \right)} dt = \frac{1}{T_0} \int_0^{T_0} \alpha_0 \left[\cos \omega_0 \left(t + \frac{t^2}{T_0} \right) \right] e^{in\omega_0 \left(t + \frac{t^2}{T_0} \right)} dt$$

and a conjugate transform by

$$F^*(n) = \frac{1}{T_0} \int_0^{T_0} f(t) e^{-in\omega_0 \left(t + \frac{t^2}{T_0} \right)} dt = \frac{1}{T_0} \int_0^{T_0} \alpha_0 \left[\cos \omega_0 \left(t + \frac{t^2}{T_0} \right) \right] e^{-in\omega_0 \left(t + \frac{t^2}{T_0} \right)} dt .$$

Substituting

$$\cos \omega_0 \left(t + \frac{t^2}{T_0} \right) = \frac{1}{2} \left[e^{-i\omega_0 \left(t + \frac{t^2}{T_0} \right)} + e^{i\omega_0 \left(t + \frac{t^2}{T_0} \right)} \right]$$

in $F(n)$ and $F^*(n)$ gives

$$F(n) = \frac{\alpha_0}{2} \left[\frac{1}{T_0} \int_0^{T_0} e^{i(n+1)\omega_0 \left(t + \frac{t^2}{T_0}\right)} dt + \frac{1}{T_0} \int_0^{T_0} e^{i(n-1)\omega_0 \left(t + \frac{t^2}{T_0}\right)} dt \right]$$

and

$$F^*(n) = \frac{\alpha_0}{2} \left[\frac{1}{T_0} \int_0^{T_0} e^{-i(n+1)\omega_0 \left(t + \frac{t^2}{T_0}\right)} dt + \frac{1}{T_0} \int_0^{T_0} e^{-i(n-1)\omega_0 \left(t + \frac{t^2}{T_0}\right)} dt \right] .$$

Completing the square in each exponent,

$$\frac{t^2}{T_0} + t = \frac{t^2}{T_0} + t + \frac{T_0}{4} - \frac{T_0}{4} = \left(\frac{t}{\sqrt{T_0}} + \frac{\sqrt{T_0}}{2} \right)^2 - \frac{T_0}{4}$$

then

$$e^{\pm i(n+1)\omega_0 \left(t + \frac{t^2}{T_0}\right)} = e^{\pm i(n+1)\omega_0 \left(\frac{t}{\sqrt{T_0}} + \frac{\sqrt{T_0}}{2}\right)^2} e^{\pm i(n+1)\omega_0 \frac{T_0}{4}}$$

$$e^{\pm i(n-1)\omega_0 \left(t + \frac{t^2}{T_0}\right)} = e^{\pm i(n-1)\omega_0 \left(\frac{t}{\sqrt{T_0}} + \frac{\sqrt{T_0}}{2}\right)^2} e^{\pm i(n-1)\omega_0 \frac{T_0}{4}}$$

$$F(n) = \frac{\alpha_0}{2} \left[\frac{e^{-i(n+1)\pi/2}}{\sqrt{2\pi(n+1)}} \int_a^b e^{i\theta^2} d\theta + \frac{e^{-i(n-1)\pi/2}}{\sqrt{2\pi(n-1)}} \int_c^d e^{i\theta^2} d\theta \right]$$

and

$$F^*(n) = \frac{\alpha_0}{2} \left[\frac{e^{i(n+1)\pi/2}}{\sqrt{2\pi(n+1)}} \int_a^b e^{-i\theta^2} d\theta + \frac{e^{i(n-1)\pi/2}}{\sqrt{2\pi(n-1)}} \int_c^d e^{-i\theta^2} d\theta \right]$$

31

where

$$a = \frac{1}{2}\sqrt{2\pi(n+1)}$$

$$b = \frac{3}{2}\sqrt{2\pi(n+1)}$$

$$c = \frac{1}{2}\sqrt{2\pi(n-1)}$$

and

$$d = \frac{3}{2}\sqrt{2\pi(n-1)} \quad .$$

Thus,

$$F(n)F^*(n) = \frac{\alpha_0^2}{4}\left\{\frac{1}{2\pi(n+1)}\int_a^b[\cos\theta^2 + i\sin\theta^2]d\theta\int_a^b[\cos\theta^2 - i\sin\theta^2]d\theta\right.$$

$$+ \frac{e^{-i\pi}}{2\pi\sqrt{n^2-1}}\int_a^b e^{i\theta^2}d\theta\int_c^d e^{-i\theta^2}d\theta + \frac{e^{i\pi}}{2\pi\sqrt{n^2-1}}\int_a^b e^{-i\theta^2}d\theta\int_c^d e^{i\theta^2}d\theta$$

$$\left. + \frac{1}{2\pi(n-1)}\int_c^d[\cos\theta^2 + i\sin\theta^2]d\theta\int_c^d[\cos\theta^2 - i\sin\theta^2]d\theta\right\} \quad .$$

Finally, it can be shown that

$$F(n)F^*(n) = \frac{\alpha_0^2}{8\pi}\left\{\left[\frac{1}{\sqrt{n+1}}\int_a^b\cos\theta^2 d\theta - \frac{1}{\sqrt{n-1}}\int_c^d\cos\theta^2 d\theta\right]^2\right.$$

$$\left. + \left[\frac{1}{\sqrt{n+1}}\int_a^b\sin\theta^2 d\theta - \frac{1}{\sqrt{n-1}}\int_c^d\sin\theta^2 d\theta\right]^2\right\}, \quad n \geq 1 \quad .$$

That is, this extension to a transform permits the calculation of $|F(n)|^2$ for the function $f(t) = \alpha_0 \cos \omega_0[(t + t^2/T_0)]$ in terms of Fresnel integrals.[†]

To see that $F(n)$ may be interpreted in terms of a Fourier transform consider

$$F(\omega) = \frac{1}{T} \int_0^T f(t) e^{in\omega_T \left(t + \frac{\omega_1}{n\omega_T} t^2\right)}$$

where ω_1 is a constant. Then, we may write

$$F(\omega) = \frac{1}{T} \int_0^T f(t) e^{i\omega_1 t^2} e^{in\omega_T t} \, dt = \frac{1}{T} \int_0^T f(t) [\cos \omega_1 t^2 + i \sin \omega_1 t^2] e^{in\omega_T t} dt \ .$$

By setting

$$x(t) = f(t) \cos \omega_1 t^2$$

$$y(t) = f(t) \sin \omega_1 t^2$$

and

$$z(t) = x(t) + iy(t) \ ,$$

then

$$F(\omega) = \frac{1}{T} \int_0^T z(t) e^{in\omega_T t} dt$$

and $F(\omega)$ is the Fourier transform of the complex function[2] $z(t)$.

The preceding analysis suggests considering finite transformations of the form

$$F(\omega) = \frac{1}{T} \int_0^T f(t) e^{in\omega_0 P(t)} dt$$

[†]For $n = 1$, $c = d$ and two of the integrals in $F(1)F^*(1)$ are zero. For $n = 0$, $F(0)F^*(0) = \left(\frac{1}{T_0} \int_0^{T_0} f(t) dt\right)^2$.

where

$$P(t) = t + \sum_{p=2}^{P} \frac{\omega_p}{n\omega_0} t^p .$$

The ω_p are constants to be adjusted to find a "best fit" with non-stationary functions $f(t)$, $0 \le t \le T$, for a series similar to the Fourier series. As a first step in this direction, the function $F(n)$ is shown to be the Fourier transform of the complex function $z(t) = x(t) + iy(t)$ where

$$z(t) = f(t) \exp\left[i \sum_{p=2}^{P} \omega_p t^p\right] = f(t)\left[\cos\left(\sum_{p=2}^{P} \omega_p t^p\right) + \sin\left(\sum_{p=2}^{P} \omega_p t^p\right)\right]$$

$$= x(t) + iy(t) .$$

For $f(t)\epsilon L_2$, $0 \le t \le T$, the Fourier transform is represented by

$$F(\omega) = \frac{1}{T} \int z(t) e^{in\omega_T t} \, dt$$

and a sufficient condition for the existence[3] of $F(\omega)$ is that

$$\frac{1}{T} \int_0^T |z(t)| dt < \infty .$$

Consider the modulus of $z(t)$,

$$|z(t)| = \left| \left\{ f^2(t) \left[\cos\left(\sum_{p=2}^{P} \omega_p t^p\right) + i \sin\left(\sum_{p=2}^{P} \omega_p t^p\right)\right] \left[\cos\left(\sum_{p=2}^{P} \omega_p t^p\right) \right. \right. \right.$$

$$\left. \left. \left. - i \sin\left(\sum_{p=2}^{P} \omega_p t^p\right)\right]\right\}^{\frac{1}{2}}\right| = |f(t)| .$$

Thus, since $f(t)\epsilon L_2$, $|z(t)|\epsilon L_2$ and the transform exists. The existence of $F^*(\omega)$ is demonstrated in a similar fashion.[3]

REFERENCES

1. R. C. McCarty and G. W. Evans II, "On Some Theorems for A Non-Stationary Stochastic Process with a Continuous, Non-Random, Time-Dependent Component," Technical Report 4, SRI Project No. 3857, Contract SD-103 under ARPA Order 281-62, Stanford Research Institute, Menlo Park, California (September 1962).

2. For a discussion of the Fourier transforms of complex functions, see Paley, R.E.A.C, and Wiener, N., "Fourier Transforms in the Complex Domain" *American Mathematical Society Colloquium Publications Volume XIX* (American Mathematical Society, New York, N.Y., 1934).

3. For proof see N. Wiener, *The Fourier Integral and Certain of Its Applications*, Dover Publications, Inc., New York, N.Y. (1933), Chapter 1.

STANFORD RESEARCH INSTITUTE | **MENLO PARK CALIFORNIA**

Regional Offices and Laboratories

Southern California Laboratories
820 Mission Street
South Pasadena, California

Washington Office
808 17th Street, N.W.
Washington 6, D.C.

New York Office
270 Park Avenue, Room 1770
New York 17, New York

Detroit Office
1025 East Maple Road
Birmingham, Michigan

European Office
Pelikanstrasse 37
Zurich 1, Switzerland

Japan Office
911 Iino Building
22, 2-chome, Uchisaiwai-cho, Chiyoda-ku
Tokyo, Japan

Representatives

Honolulu, Hawaii
1125 Ala Moana Blvd.
Honolulu, Hawaii

London, England
19, Upper Brook Street
London, W. 1, England

Milan, Italy
Via Macedonio Melloni, 49
Milano, Italy

Toronto, Ontario, Canada
Room 710, 67 Yonge St.
Toronto, Ontario, Canada

DISTRIBUTION LIST

ORGANIZATION	NO. OF COPIES	ORGANIZATION	NO. OF COPIES
Director Office of Sec. of Defense Washington 25, D.C. Attn: Lt. Col. Kenneth Cooper	6	U.S. Army Signal Missile Support Agency White Sands Missile Range New Mexico	1
Office of Director Defense Research and Engineering Weapons Systems Evaluation Group The Pentagon Washington 25, D.C.	1	Headquarters U.S. Army Air Defense Command Ent Air Force Base Colorado Springs, Colorado	1
Department of the Army Office, Chief of Ordnance Washington 25, D.C.		Bureau of Naval Weapons Navy Department Washington 25, D.C.	1
Army Ordnance Missile Command Redstone Arsenal, Alabama Attn: AMSMI-RNR/Re-Entry Physics Branch	1	U.S. Navy Electronics Laboratory San Diego 52, California	1
Dr. Nils L. Muench Institute for Defense Analyses 1825 Connecticut Avenue, N.W. Washington 9, D.C.	2	U.S. Naval Missile Center Advanced Programs Department Point Mugu, California	1
		U.S. Naval Research Laboratory Washington 25, D.C.	1
Army Ordnance Missile Command Liaison Office Bell Telephone Laboratories Whippany, New Jersey	1	U.S. Navy Headquarters Pacific Missile Range Point Mugu, California	1
U.S. Army Ordnance Diamond Ordnance Fuze Laboratories Washington 25, D.C. Attn: Dr. B. Altmann	1	Headquarters North American Air Defense Command Ent Air Force Base Colorado Springs, Colorado	1
Armed Services Technical Information Agency Arlington Hall Station Arlington 12, Virginia Attn: TICSCP	5	Space Intelligence Division Headquarters, North American Air Defense Command Ent Air Force Base Colorado Springs, Colorado	1
Ordnance Technical Intelligence Agency Arlington Hall Station Arlington 12, Virginia	1	U.S. Air Force Headquarters, Air Force Systems Command A.F. Unit Post Office Los Angeles 45, California	1
U.S. Army Ordnance Picatinny Arsenal Dover, New Jersey	1	U.S. Air Force Air Force Systems Command Regional Office Los Angeles 28, California	1
U.S. Army, Office, Chief of Research and Development Department of the Army Washington 25, D.C.	1	Hughes Aircraft Company Florence and Teale Streets Building 5, MS B-105 Culver City, California	1
8533 DU U.S. Army Technical Branch Collection Division OACSI, DA The Pentagon, 2B457 Washington 25, D.C.	1	Dr. Seymour Edelberg MIT Lincoln Laboratories Lexington, Mass.	1
		Aaron Galvin MIT Lincoln Laboratories Lexington, Mass.	

ORGANIZATION	NO. OF COPIES	ORGANIZATION	NO. OF COPIES
U.S. Air Force Aeronautical Systems Division Wright-Patterson Air Force Base, Ohio	1	Syracuse University Research Corporation University Station Syracuse 10, New York	1
U.S. Air Force Aeronautical Systems Division Detachment 4 Eglin Air Force Base, Florida	1	Aerojet-General Corporation Azusa, California	1
U.S. Air Force Ballistic Systems Division Air Force Unit Post Office Los Angeles 45, California	1	Aerospace Corporation P.O. Box 95085 Los Angeles 45, California Attn: Library Technical Documents Group	1
U.S. Air Force Air Force Cambridge Research Laboratories Laurence G. Hanscom Field Bedford, Massachusetts	1	Avco Corporation 201 Lowell Street Wilmington, Massachusetts	1
U.S. Air Force Air Force Cambridge Research Laboratories Laurence G. Hanscom Field Bedford, Massachusetts Attn: Norman Wolfson Rosenberg	1	Avco-Everett Research Laboratory 2385 Revere Beach Parkway Everett, Massachusetts	1
National Aeronautics & Space Administration Ames Research Center Moffett Field, California	1	Barnes Engineering Company 30 Commerce Road Stamford, Connecticut	1
Armour Research Foundation 10 W. 35th Street Chicago 16, Illinois	1	Battelle Defender Battelle Memorial Institute 505 King Street Columbus 1, Ohio	1
University of Chicago Laboratories for Applied Sciences Chicago 37, Illinois	1	Bell Telephone Laboratories Whippany Road Whippany, New Jersey	1
Electronics Research Laboratories Columbia University New York 27, New York Attn: Lawrence H. O'Neill	1	Bendix Corporation Bendix Systems Division 3300 Plymouth Road Ann Arbor, Michigan	1
Cornell Aeronautical Laboratory, Inc. 4455 Genesee Street Buffalo 21, New York	1	Bendix Corporation Bendix Radio Division Towson 4, Maryland	1
Denver Research Institute University of Denver University Park Denver 10, Colorado	1	The Boeing Company Aerospace Division Seattle 24, Washington	1
Research Laboratory of Electronics Massachusetts Institute of Technology Cambridge 39, Massachusetts Attn: George Graham Harvey	1	Chance Vought Corporation Dallas 22, Texas	1
Massachusetts Institute of Technology Aerophysics Laboratory Cambridge 39, Massachusetts	1	Chrysler Corporation Missile Division P.O. Box 2628 Detroit 31, Michigan	1
Massachusetts Institute of Technology Lincoln Laboratory P.O. Box 73 Lexington 73, Massachusetts Attn: Glen F. Pippert	1	Defense Research Corporation 4050 State Street Santa Barbara, California Attn: Ben Alexander	1
Purdue University Lafayette, Indiana Attn: Dr. Robert Goulard	1	Douglas Aircraft Company 3000 Ocean Park Boulevard Santa Monica, California	1
		Electro-Optical Systems, Inc. 125 North Vinedo Avenue Pasadena, California	1

ORGANIZATION	NO. OF COPIES	ORGANIZATION	NO. OF COPIES
Ford Motor Company Aeronutronic Division Ford Road Newport Beach, California Attn: Acquisitions Librarian	1	Lockheed Corporation Missile and Space Divisions Palo Alto, California	1
General Dynamics Astronautics Division San Diego 12, California	1	Lockheed Corporation Missiles and Space Divisions Sunnyvale, California	1
General Dynamics Convair Division San Diego 12, California	1	Martin Company Denver Division Mail #A-314 Denver 1, Colorado	1
General Dynamics Electronics Military Products Division San Diego 12, California	1	The Mitre Corporation Middlesex Turnpike Bedford, Massachusetts	1
General Electric Company Space Sciences Laboratory Space Technology Center King of Prussia, Pennsylvania Attn: Joseph Farber	1	North American Aviation, Inc. International Airport Los Angeles 45, California Attn: Alan John Grobecker	1
General Electric Company, TEMPO 735 State Street Santa Barbara, California Attn: Walter Hausz	1	Northrop Corporation Nortronics Division Research Park Palos Verdes Estates, California Attn: Kudumalakunte N. Satyendra	1
General Electric Company Heavy Military Electronics Dept. Building 9, Room 29 Court Street Plant Syracuse, New York Attn: John P. Costas	1	Radio Corporation of America Major Defense Systems Division Building 127-311 Moorestown, New Jersey Attn: Heinrich O. Benecke Attn: Mr. Benedict Kingsley	1
General Motors Corporation Defense Systems Division Box T Santa Barbara, California Attn: Arnold T. Nordsieck	1	Radio Corporation of America Missile and Surface Radar Division Building 108-207 Moorestown, New Jersey Attn: Archie Gold	1
General Motors Corporation Defense Systems Division Box T Santa Barbara, California Attn: C. M. Shaar	1	Radio Corporation of America Missile and Surface Radar Division Borton Landing Road Moorestown, New Jersey Attn: Alvin David Gottlieb	1
Geophysics Corporation of America Burlington Road Bedford, Massachusetts Attn: Jean Irl Francis King	1	The RAND Corporation 1700 Main Street Santa Monica, California	1
Hughes Aircraft Company Fullerton, California	1	Raytheon Company Missile and Space Division Santa Barbara, California	1
Institute for Defense Analyses 1825 Connecticut Avenue, N.W. Washington 9, D.C. Attn: John Joseph Martin	1	Raytheon Company Missile and Space Division Hartwell Road Bedford, Massachusetts	1
ITT Federal Laboratories 225 Santa Monica Blvd. Santa Monica, California	1	Space Technology Laboratories, Inc. P.O. Box 95001 Los Angeles 45, California	1
Lockheed Corporation California Division Burbank, California	1	Sperry Rand Corporation Sperry Gyroscope Company Division Great Neck, New York	1

ORGANIZATION	NO. OF COPIES	ORGANIZATION	NO. OF COPIES
Sylvania Electronics Products, Inc. Electronic Defense Laboratories Mountain View, California	1	System Development Corporation 2500 Colorado Avenue Santa Monica, California	1
Sylvania Electrical Products, Inc. 100 - 1st Avenue Waltham 54, Massachusetts	1	Westinghouse Electric Corporation Box 746 Baltimore, Maryland	1

Air University Library
U.S. Air Force
Maxwell Air Force Base, Alabama
Attn: AAL-3T-62-878a
  Elizabeth Perkins
  Document Librarian
	1		